INSULATED TERMINALS

0.5 - 1.5mm²

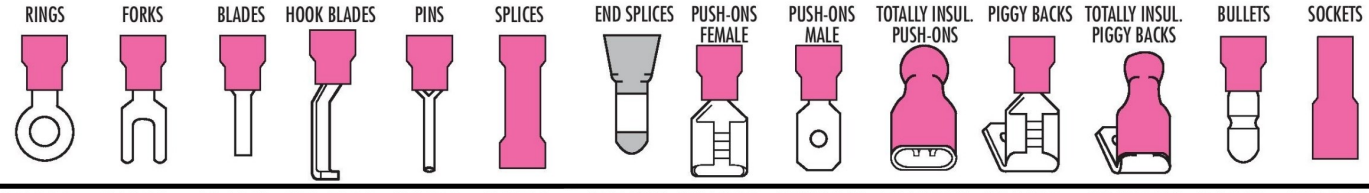

RINGS	FORKS	BLADES	HOOK BLADES	PINS	SPLICES	END SPLICES	PUSH-ONS FEMALE	PUSH-ONS MALE	TOTALLY INSUL. PUSH-ONS	PIGGY BACKS	TOTALLY INSUL. PIGGY BACKS	BULLETS	SOCKETS
IR 1.5-2.2	IF 1.5-3.2	IBL 1.5-10	IHBL 1.5-3.0	IP 1.5-9.5	IS 1.5-1.5	IES 1.5(NG)	IPO 1.5-2.8	IPOM 1.5-4.8	IPO 1.5-2.8 TI	IPB 1.5-6.3	IPB 1.5-6.3 TI	IB 1.5-4.0	ISO 1.5-4.0
IR 1.5-3.2	IF 1.5-3.7	IBL 1.5-11	IHBL 1.5-4.6	IP 1.5-12			IPO 1.5-4.8	IPOM 1.5-6.3	IPO 1.5-4.8 TI				
IR 1.5-3.7	IF 1.5-4.3	IBL 1.5-14					IPO 1.5-6.3		IPO 1.5-6.3 TI				
IR 1.5-4.3	IF 1.5-5.3	IBL 1.5-18											
IR 1.5-5.3	IF 1.5-6.5												
IR 1.5-6.5													
IR 1.5-8.5													
IR 1.5-10													
IR 1.5-12													

1.5 - 2.5mm²

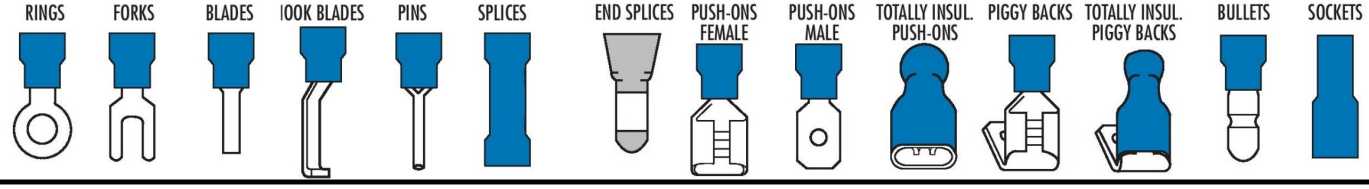

RINGS	FORKS	BLADES	HOOK BLADES	PINS	SPLICES	END SPLICES	PUSH-ONS FEMALE	PUSH-ONS MALE	TOTALLY INSUL. PUSH-ONS	PIGGY BACKS	TOTALLY INSUL. PIGGY BACKS	BULLETS	SOCKETS
IR 2.5-2.2	IF 2.5-3.2	IBL 2.5-9	HBL 2.5-3.0	IP 2.5-9.5	IS 2.5-2.5	IES 2.5(NG)	IPO 2.5-4.8	IPOM 2.5-4.8	IPO 2.5-4.8 TI	IPB 2.5-6.3	IPB 2.5-6.3 TI	IB 2.5-4.0	ISO 2.5-4.0
IR 2.5-3.2	IF 2.5-3.7	IBL 2.5-18	HBL 2.5-4.6	IP 2.5-12			IPO 2.5-6.3	IPOM 2.5-6.3	IPO 2.5-6.3 TI			IB 2.5-5.0	ISO 2.5-5.0
IR 2.5-3.7	IF 2.5-4.3												
IR 2.5-4.3	IF 2.5-5.3												
IR 2.5-5.3	IF 2.5-6.5												
IR 2.5-6.5	IF 2.5-8.5												
IR 2.5-8.5													
IR 2.5-10													
IR 2.5-12													

4 - 6mm²

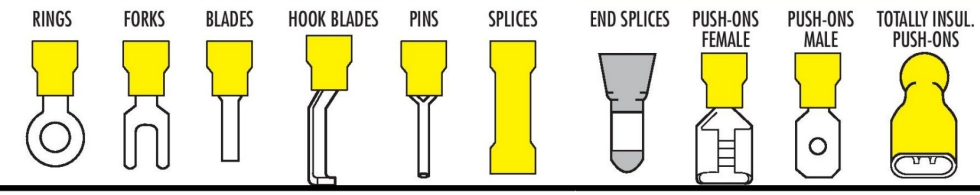

RINGS	FORKS	BLADES	HOOK BLADES	PINS	SPLICES	END SPLICES	PUSH-ONS FEMALE	PUSH-ONS MALE	TOTALLY INSUL. PUSH-ONS
IR 6-3.2	IF 6-3.7	IBL 6-10	IHBL 6-4.6	IP 6-14	IS 6-6	IES 6 (NG)	IPO 6-6.3	IPOM 6-6.3	IPO 6-6.3 TI
IR 6-3.7	IF 6-4.3	IBL 6-18					IPO 6-9.5		
IR 6-4.3	IF 6-5.3								
IR 6-5.3	IF 6-6.5								
IR 6-6.5	IF 6-8.5								
IR 6-8.5									
IR 6-10									
IR 6-12									

CERTIFIED ISO 9001

UL

APPROVED

Email : sales@kompress.com
Telephone : 0115 958 1029

END TERMINALS

0.5mm² Conductor

REFERENCE	COLOUR
KPET 0.5 FDT	White
KPET 0.5 GT	Orange
KPET 0.5 X2FDT	White
KPET 0.5x2GT	Orange

0.75mm² Conductor

REFERENCE	COLOUR
KPET 0.75 FT	Blue
KPET 0.75 GT	White
KPET 0.75 x2FT	Blue
KPET 0.75 X 2GT	White

1.0mm² Conductor

REFERENCE	COLOUR
KPET 1.0 FDT	Red
KPET 1.0 GT	Yellow
KPET 1.0 X2FDT	Red
KPET 1.0 X2GT	Yellow

1.5mm² Conductor

REFERENCE	COLOUR
KPET 1.5 FDT	Black
KPET 1.5 GT	Red
KPET 1.5 X2FDT	Black
KPET 1.5 X2GT	Red

2.5mm² Conductor



REFERENCE	COLOUR
KPET 2.5 F	Grey
KPET 2.5 GD	Blue
KPET 2.5 X2F	Grey
KPET 2.5 X2GD	Blue

4mm² Conductor



REFERENCE	COLOUR
KPET 4 F	Orange
KPET 4 GD	Grey
KPET 4 X2F	Orange
KPET 4 X2 GD	Grey

6mm² Conductor



REFERENCE	COLOUR
KPET 6 D	Yellow
KPET 6 F	Green
KPET 6 G	Black
KPET 6 X2D	Yellow

10mm² Conductor



REFERENCE	COLOUR
KPET 10 D	Red
KPET 10 F	Brown
KPET 10 G	Ivory
KPET 10 X2D	Red

16mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KEPT 16 D	Blue
KEPT 16 FDT	Ivory
KEPT 16 GT	Green
KEPT 16 X2D	Blue

25mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 25 D	Yellow
KPET 25 F	Black
KPET 25 G	Brown

35mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 35 FD	Red
KPET 35 G	Beige

50mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 50 FD	Blue
KPET 50 G	Olive

70mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 70	Yellow

95mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 95	Red

120mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 120	Blue

150mm² Conductor



Shown 80% Actual Size

REFERENCE	COLOUR
KPET 150	Yellow

END TERMINAL TOOLS

KTET 15 - 0.5 to 6mm
End Terminal
Indent Crimp

KTET 16 - 6 to 16mm
End Terminal
Indent Crimp

LEGEND

F = French

G = German

D = Din

T = Tri-rated cables

X2 = Twin
(to accept 2 cables)

The complete range of end terminals is also available non-insulated. To specify, replace KPET prefix with KUET

Email : sales@kompress.com
Telephone : 0115 958 1029